

SO-1066-10385/10386

RELAY SOCKET
5 AMP



Basic socket series designation for:


YA Series


Designed to the standards and requirements of:

MIL-DTL-12883/44

.


HARDWARE MOUNTING
MOUNTING DETAIL 3 PLACES

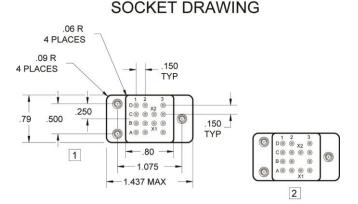



NO. 8-32 UNC-2A 3 PLACES STUD NO. 4-40 UNC-2A 3 PLACES NO. 4-40 UNC-2A 3 PLACES NO. 4-40 UNC-2A 3 PLACES

MOUNTING DIMENSIONS

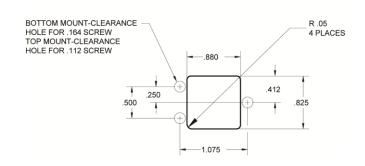

GENERAL CHARACTERISTICS

1. Supplied with mounting hardware and No. 20 contacts and crimp for coil codes F, K (SO-1066-10385).	
2. Supplied with mounting hardware and No. 20 contacts and crimp for coil codes E, J (SO-1066-10386).	
3. Standard tolerances	.xx ±.01; xxx ± .005
4. Weight	.055 lb max
5. Temperature range	-70° C to +125° C

(714) 736-7598 • leachcorp.com • LINA.CustomerService@LeachCorp.com