

- **Permanent operation**
Service Permanent

- **Main contact**
Contact principal **3 PST – NO**

- **Auxiliary contact**
Contacts auxiliaires **Up to 8 PDT form C**
Jusqu'à 8 inverseurs

- **Coil supply**
Service Permanent **Direct current**
Courant continu

- **Related standard**
Normes de référence **MIL-PRF-6106P**

PRINCIPAL TECHNICAL CHARACTERISTICS CARACTERISTIQUES TECHNIQUES PRINCIPALES

- **Contact rated at**
Prévu pour commuter **175 Amps / 28 Vdc**
175 A / 28 Vcc

- **Overall size**
Dimensions hors tout **82,5 x 68.7 x 90.15 mm (without flying lead)**
82,5 x 68.7 x 90.15 mm (sans toron)

- **Metal body, thermoplastic cover for dust protection**
Corps métallique, capots thermoplastiques étanches à la poussière

- **Special models available upon request**
Modèles spécifiques sur demande

- **Weight**
Masse **≤ 640g (CA175S- D8N-B)**
≤ 640g (CA175S- D8N-B)

GENERAL CHARACTERISTICS CARACTERISTIQUES GENERALES

Contact rating per load type, main contact <i>Contact principal par type de charge</i>	28 Vcc
Resistive / Résistif	175A
Inductive / Inductif [1]	120A
Motor / Moteur	160A

Contact rating per load type, auxiliary contact <i>Contact auxiliaire par type de charge</i>	28 Vcc	115 Vac / 400Hz
Resistive / Résistif	5A	5A
Inductive / Inductif [1]	2A	2A
Minimum current / Courant minimum	2mA	2mA

LEACH INTERNATIONAL EUROPE S.A.S.

Tel: +33 3 87 97 98 97

Fax: +33 3 87 97 96 86

LEACH INTERNATIONAL ASIA PACIFIC

Tel: +852 2 191 3830

Fax: +852 2 389 5803

The technical information provided by Leach International Europe is to be used as a guide only, and is not meant for publication or as documentation for altering any existing specification. Dimensions are in millimeters unless otherwise specified. Rev. 04/2022.


COILS CHARACTERISTICS (Vdc) CARACTERISTIQUES DES BOBINES (Vcc)

Code	N
Nominal voltage Tension nominale	28Vdc
Maximum voltage Tension maximum	32,5Vdc
Maximum pickup voltage Tension max. d'enclenchement assuré	18Vdc
Dropout voltage Tension de déclenchement	1,7Vdc min at 25°C. 3,5Vdc max at 25°C.
Inrush current Courant d'appel 25°C	5A max at 28Vcc
Hold current Courant de maintien 25°C	0,5A max at 28Vcc


GENERAL CHARACTERISTICS CARACTERISTIQUES GENERALES

Temperature range <i>Gamme de température</i>	-55°C to +85°C
Life at nominal load <i>Durée de vie minimale sous charge nominale</i>	50,000 cycles
Dielectric strength at sea level (main contact) <i>Rigidité diélectrique au niveau de la mer (contact principal)</i>	1800 Vrms
Insulation resistance at 500 Vdc <i>Résistance d'isolement sous 500 Vcc</i>	100 MΩ min.
Sinusoidal vibrations <i>Vibrations sinusoïdales</i>	10G / 10 to 2000Hz
Shocks <i>Chocs</i>	15G / 11ms
Maximum contact opening time under vibrations and shocks <i>Durée maximum d'ouverture des contacts sous l'influence des vibrations et chocs</i>	10 μs
Maximum operate time at 28 Vdc <i>Temps d'enclenchement sous 28 Vcc</i>	15 ms max at 25°C
Maximum dropout time at 28 Vdc <i>Temps de déclenchement sous 28 Vcc</i>	11 ms max at 25°C
Power contact voltage drop <i>Chute de tension, contact principal</i>	
- Initial voltage drop <i>chute de tension initiale</i>	110mVac max
- End of life voltage drop <i>chute de tension finale</i>	150mVac max
Auxiliary contacts <i>Contacts auxiliaires</i>	
- Contact voltage drop initial at 1A <i>Chute de tension de contact initiale sous 1A</i>	150mVdc max
- Contact voltage drop end of life at 1A <i>Chute de tension de contact finale sous 1A</i>	200mVdc max
- Contact resistance initial (at low level) <i>Résistance de contact initiale (bas niveau)</i>	1 Ω max
- Contact resistance end of life (at low level) <i>Résistance de contact finale (bas niveau)</i>	1 Ω max
- Minimum current <i>Courant minimum</i>	2 mA [5]
Coil transient voltage at 28 Vdc <i>Ecrêtage bobine à 28 Vcc</i>	60Vdc max at 25°C [2]
Mounting torque (for C or D style) <i>Couple de serrage (pour fixation de type C ou D)</i>	3N.m±10% 40 cN.m +/-10% for the connector

MOUNTING STYLES TYPES DE CONFIGURATION

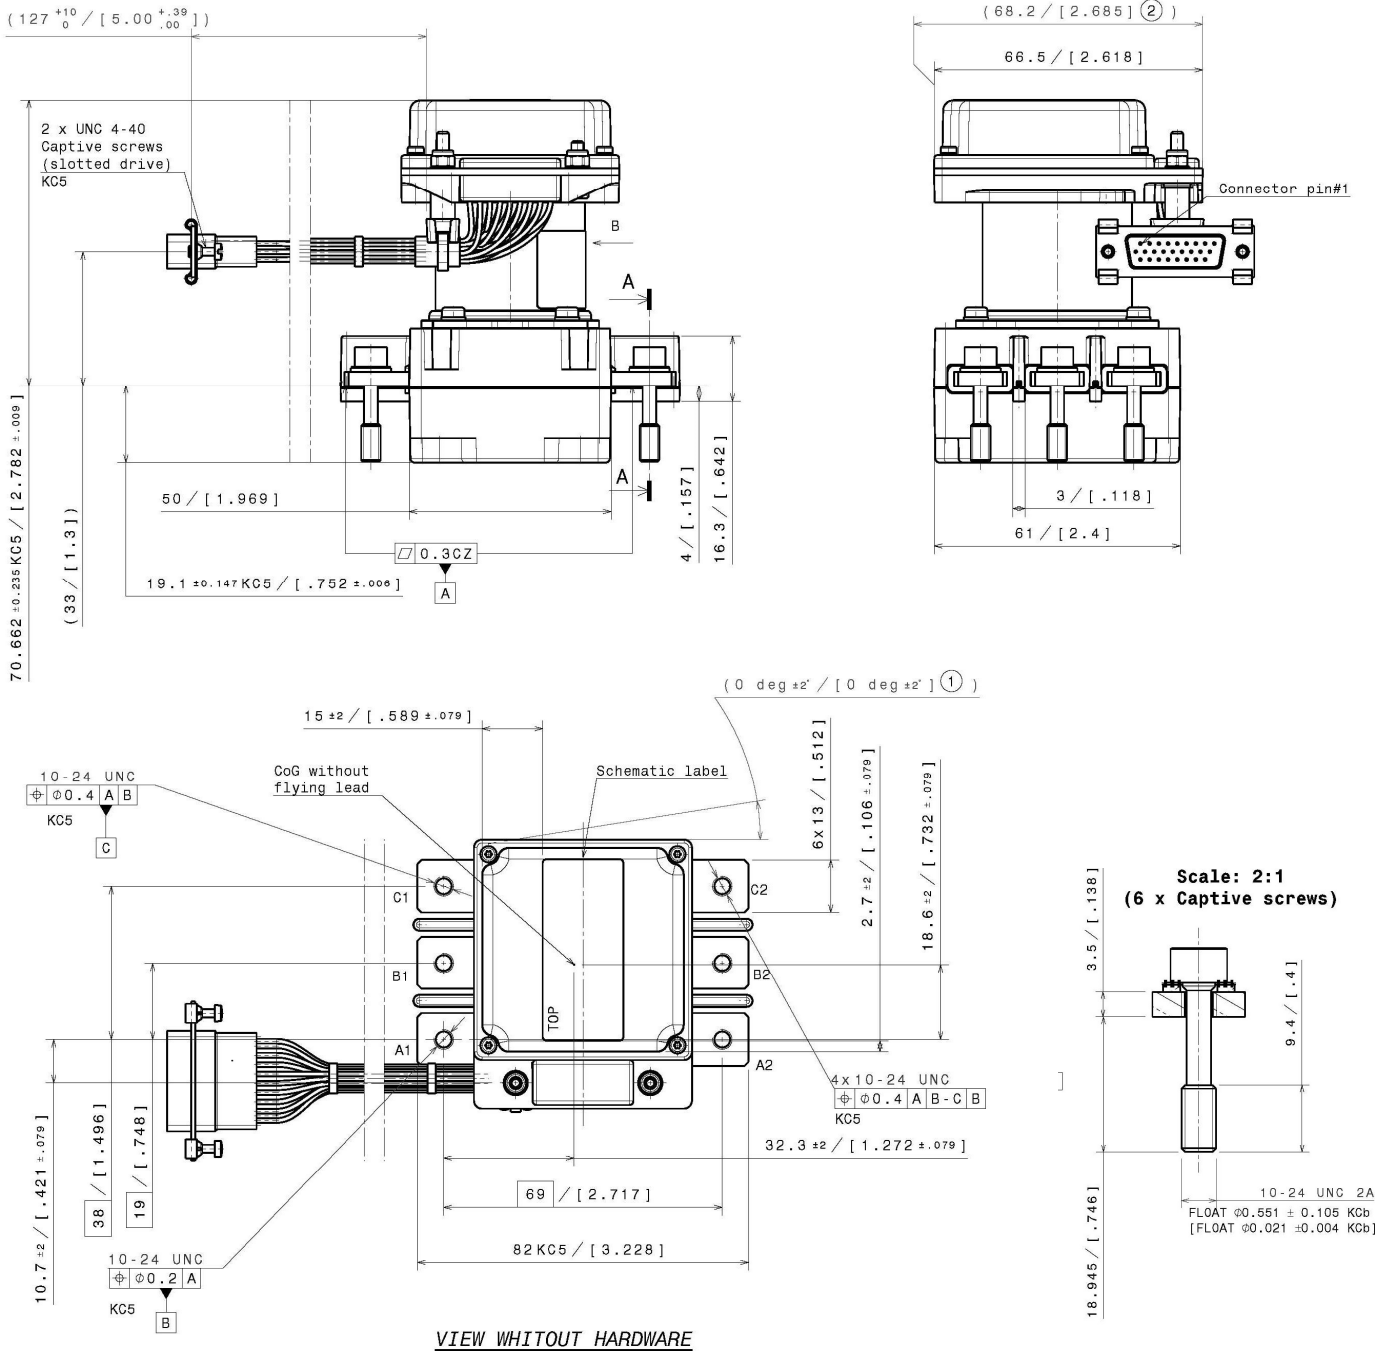

SCHEMATIC DIAGRAM SCHEMAS

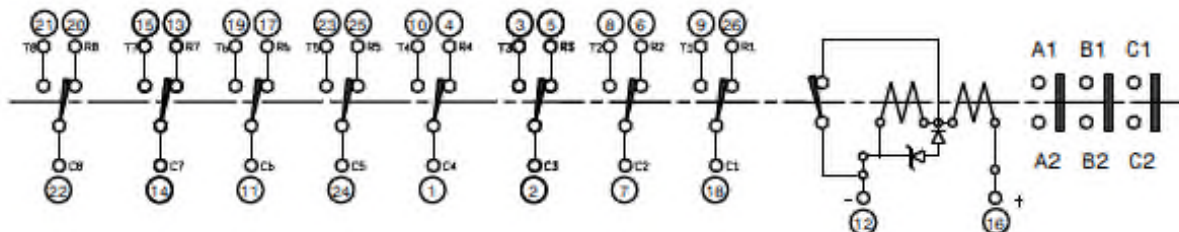

REFERENCE SYSTEM SYSTEME DE REFERENCES

CA	175	S	-	A	3	P	-	B	-	001
----	-----	---	---	---	---	---	---	---	---	-----

Contactor serie:

CA = Contacteur Alternatif

Contactor rating :

Expressed in Amps with 3 digits (050, 400, ...)

Contactor form :

S = Single Throw

D = Double Throw

L = Latch, Double Throw

C = Center-Off

Mounting style (mechanical, electrical, PST, PDT):

A = Mounting holes without barriers

B = Mounting holes with barriers

C = Captive Hardware without barriers

D = Captive Hardware with barriers

E = Stud mounting

Z = For every specific request that cannot be expressed with a standard digit

Terminal & Circuit :

0 to 8 = number of auxiliaries

(default configuration = Form C, MIL-R 6106J)

Coil voltage :

N = 28VDC + coil suppression

I = 28VDC + coil suppression Intermittent

F = 115VAC

P = 28VDC PWM

Z = For every specific request that cannot be expressed with a standard digit

AUX and supply connection

Blank : Standard version = Straight D-SUB on PCB

A : right angle D-SUB on PCB

B : flying lead turn left, standard bundle with a D-SUB

C : flying lead turn right, standard bundle with a D-SUB

Y : For every specific request that cannot be expressed with a standard digit

Add 3 digits (chrono) to express other specific options requested or for a major evolution

PRODUCTS LIST [3] [4]

LISTE DE PRODUITS

	Fixing style Fixation	Auxiliary contacts Contacts auxiliaires	Bobine style Type de bobine	Poids Masse	Notes
CA175S-D8N-B	B	8	28Vdc + coil suppression	≤ 640g	[6]

NOTES REMARQUES

1. PF=0.7, L/R 5ms

PF0.7, L/R 5ms,

2. Suppressor compatible with lightning test to DO 160C, section 22, level B4K4L4

Ecrêtage compatible avec DO 160C, section 22, niveau B4K4L4.

Before this measurement, the energy supplied by the contactor in the control circuit (unclipped spike) is less than 25 mJ over the entire range of temperature and voltage.

3. Other configurations may be possible. Please contact factory

D'autres configurations peuvent être possibles : Nous consulter.

4. Most standard and recommended part

Série standard la plus recommandée.

5. The use of the auxiliary contacts at low level current is possible only if they have never been previously used at high current level

L'utilisation des contacts auxiliaires en bas niveau n'est possible que s'ils n'ont jamais été utilisés auparavant en haut niveau.

6. Flying lead included

Toron inclus