



- **Bipolar manipulator with snap action**
Manipulateur bipolaire à rupture brusque
- **Rilsan coating bodies**
Corps revêtement rilsan
- **Contact arrangement** **2 Center on**
Combinaison des contacts

GENERAL CHARACTERISTICS

CARACTERISTIQUES GENERALES

- **Fastening by nut $\varnothing 12/75$ and anti-rotation washer**
Fixation par écrou 12/75 et rondelle antirotation
- **Mounting on panel thickness 3.5mm max**
Montage sur panneau épaisseur 3.5mm max
- **Waterproofness: standard AIR 0711**
Étanche à la pluie artificielle suivant norme AIR 0711
- **Weight** **54 g $\pm 2\%$**
Masse **54 g $\pm 2\%$**

ELECTRICAL CHARACTERISTICS

CARACTERISTIQUES ELECTRIQUES

Circuit Circuits	30 Vdc	115 Vac
Resistive / Résistif	5 A	5 A
Inductive 5/1000 / Inductif (5/1000)	3 A	3 A
Lights / Lampes	3 A	3 A
Voltage drop / Chute de tension	Initial : 60 mV End of life : 120 mV	
Temperature range / Gamme de température	-50°C to +80°C	
Endurance / Endurance	40 000 operations	


LEACH INTERNATIONAL EUROPE S.A.S.
 Tel: +33 3 87 97 98 97
 Fax: +33 3 87 97 96 86

LEACH INTERNATIONAL ASIA PACIFIC
 Tel: +852 2 191 3830
 Fax: +852 2 389 5803

The technical information provided by Leach International Europe is to be used as a guide only, and is not meant for publication or as documentation for altering any existing specification. Dimensions are in millimeters unless otherwise specified. Rev. 03/2025.

MOUNTING STYLES
 TYPES DE CONFIGURATION

Dimensions are in mm
 General tolerances, ± 0.5 mm

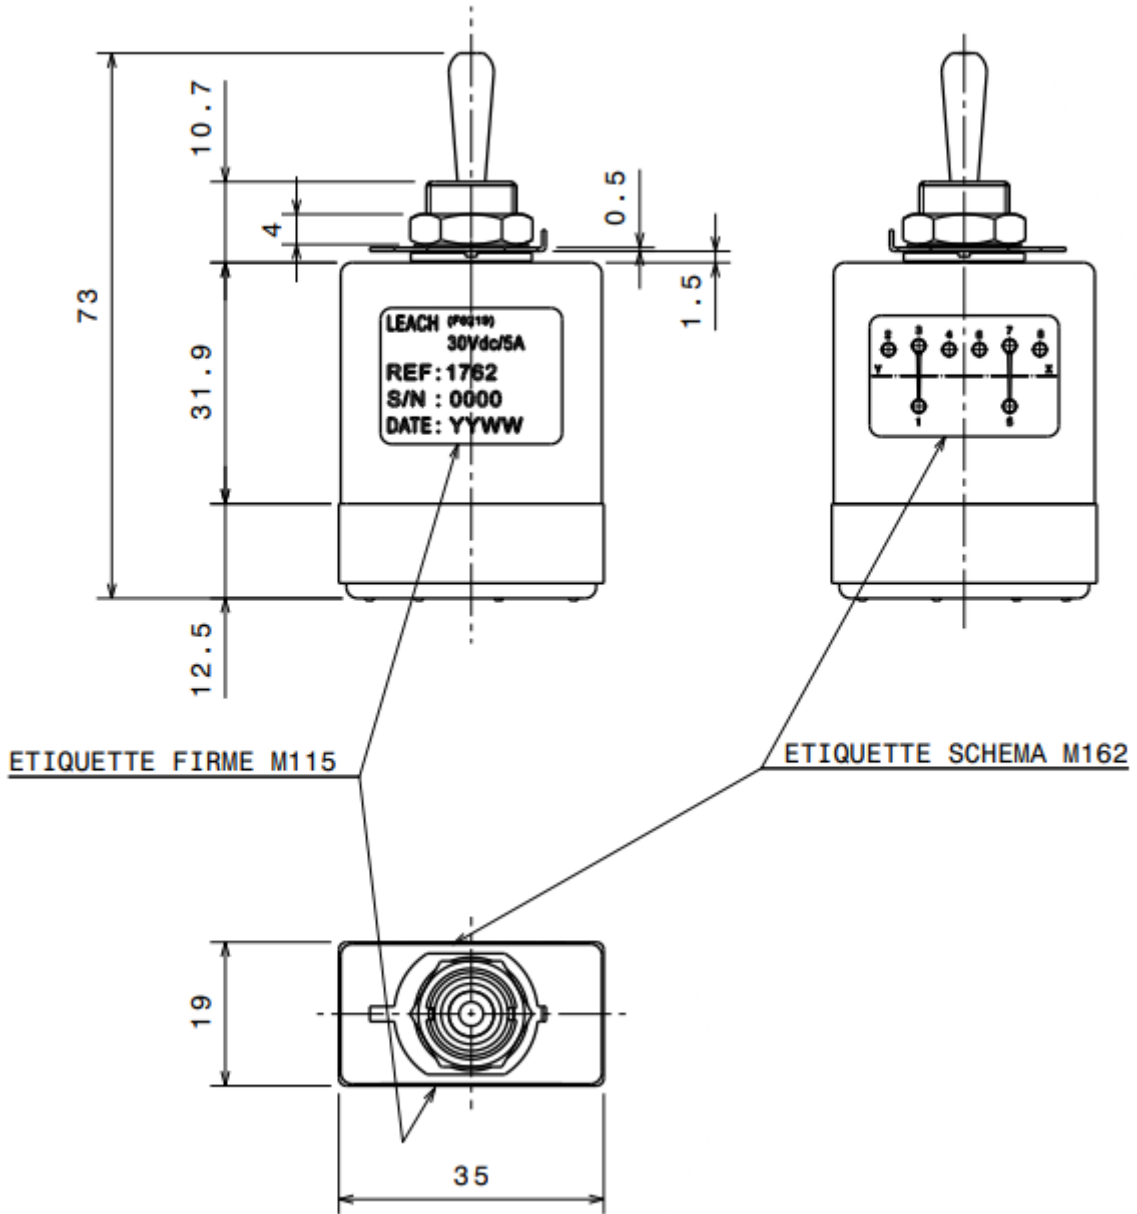

SCHEMATIC
 SCHEMA

