



- **Bipolar inverter manipulator with snap action**  
*Manipulateur inverseur bipolaire à rupture brusque*
- **Rilsan coating bodies**  
*Corps revêtement rilsan*
- **Control lever in black anodized light alloy**  
*Levier de commande en alliage léger anodisé noir*
- **Contact arrangement** **2 PDT**  
*Combinaison des contacts*



## GENERAL CHARACTERISTICS

### CARACTERISTIQUES GENERALES

- **Connection by contact TJ DEUTSH**  
*Raccordement par contact TJ DEUTSH*
- **Waterproofness: standard AIR 0711**  
*Etanche à la pluie artificielle suivant norme AIR 0711*
- **Use: 40 000 operations min without exceeding 50 mV for 200 hours of operation**  
*Usage SI 40 000 manœuvres min sans dépasser 50mV pour 200h de fonctionnement*
- **Weight** **30 g ±5%**  
*Masse* **30 g ±5%**

## ELECTRICAL CHARACTERISTICS

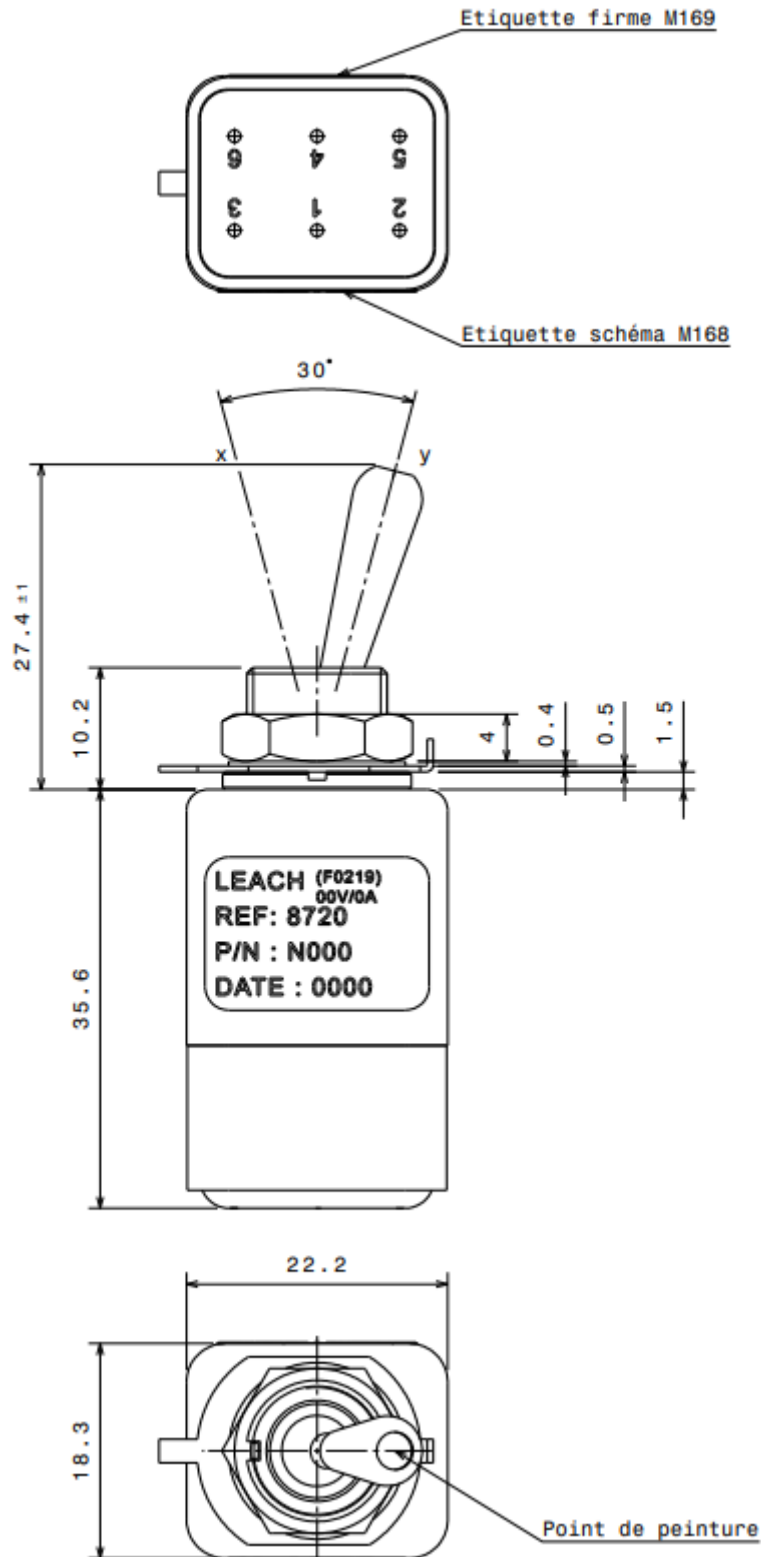
### CARACTERISTIQUES ELECTRIQUES

Circuit Circuits	30 Vdc	115 Vac / 400 Hz
Resistive / Résistif	5 A	5 A
Inductive 5/1000 / Inductif (5/1000)	3 A	3 A
Lights / Lampes	3 A	3 A
Temperature range / Gamme de température	-50°C to +80°C	

LEACH INTERNATIONAL EUROPE S.A.S.  
 Tel: +33 3 87 97 98 97  
 Fax: +33 3 87 97 96 86

LEACH INTERNATIONAL ASIA PACIFIC  
 Tel: +852 2 191 3830  
 Fax: +852 2 389 5803

The technical information provided by Leach International Europe is to be used as a guide only, and is not meant for publication or as documentation for altering any existing specification. Dimensions are in millimeters unless otherwise specified. Rev. 03/2025.

MOUNTING STYLES  
TYPES DE CONFIGURATIONDimensions are in mm  
General tolerances,  $\pm 0.5$  mm

**SCHEMATIC DIAGRAM**  
SCHEMA