



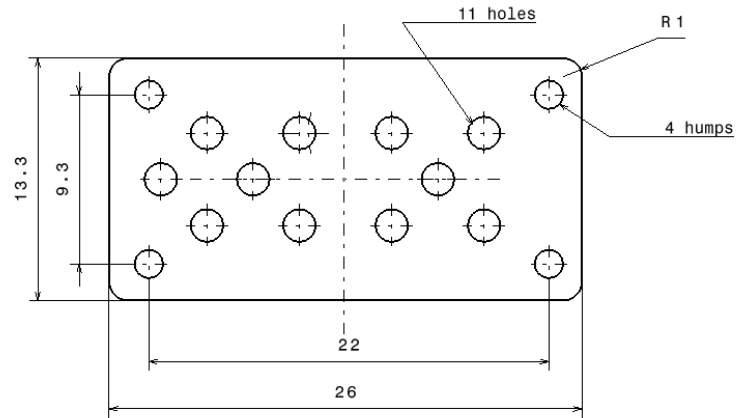

DESIGNED FOR RELAY SERIES:

M300, M301, M302
 F370, FD370
 Control Devices: FLS300, FLR300

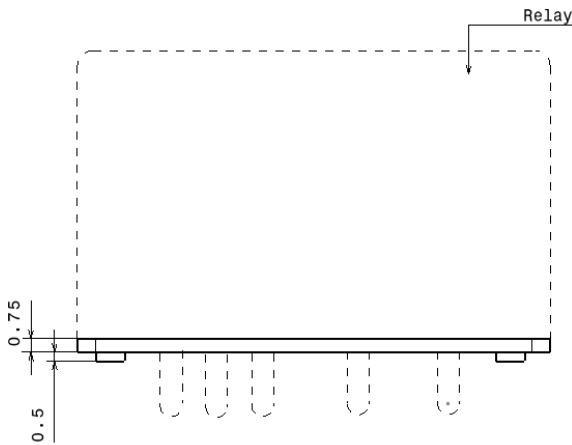

- Dimensions are in mm
- Isolation pad is fitted with humps to be positioned on the PCB side. These humps allow the cleaning of the solder Flux.
- Humps diameter : 1.57mm – Humps Height : 0.5mm
- Typical Pitch of Holes for the relay pins : 5.08mm

GENERAL CHARACTERISTICS
 CARACTERISTIQUES GENERALES

Material <i>Matière</i>	Pocan PBT-GF30
Weight <i>Poids</i>	0.42g max
Maximum temperature <i>Température maximum</i>	244°C
Flammability rating UL 94 <i>Indice d'inflammabilité UL 94</i>	V-0

LEACH INTERNATIONAL EUROPE S.A.S.

Tel: +33 3 87 97 98 97

Fax: +33 3 87 97 96 86

LEACH INTERNATIONAL ASIA PACIFIC

Tel: +852 2 191 3830

Fax: +852 2 389 5803

The technical information provided by Leach International Europe is to be used as a guide only, and is not meant for publication or as documentation for altering any existing specification. Dimensions are in millimeters unless otherwise specified. Rev. 03/2025