



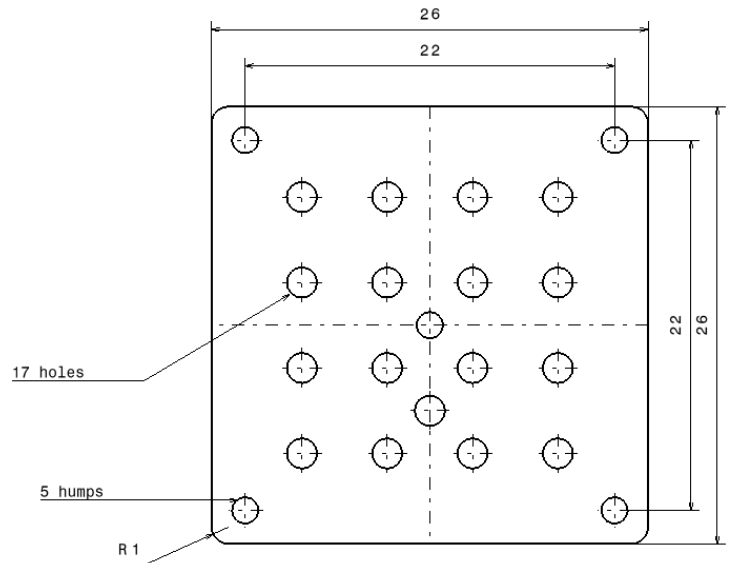

DESIGNED FOR RELAY SERIES:

M400, M401, M402
 F470, FD470, F472, FD472
 Control Devices: T412, T441, CS400, THLXX

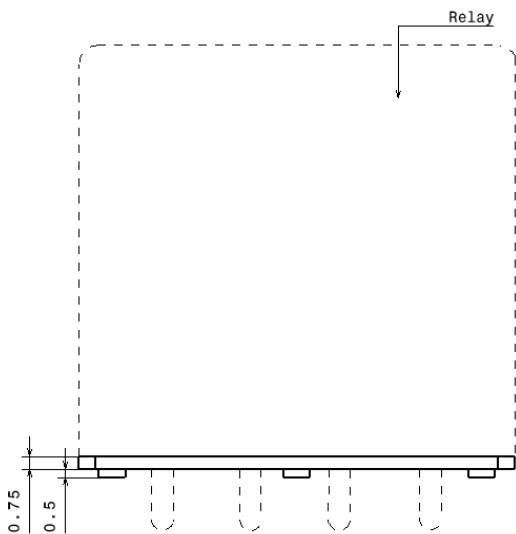

- Dimensions are in mm
- Isolation pad is fitted with humps to be positioned on the PCB side. These humps allow the cleaning of the solder Flux.
- Humps diameter : 1.57mm – Humps Height : 0.5mm
- Typical Pitch of Holes for the relay pins : 5.08mm

GENERAL CHARACTERISTICS
CARACTERISTIQUES GENERALES

Material <i>Matière</i>	Pocan PBT-GF30
Weight <i>Poids</i>	1g max
Maximum temperature <i>Température maximum</i>	244°C
Flammability rating UL 94 <i>Indice d'inflammabilité UL 94</i>	V-0

LEACH INTERNATIONAL EUROPE S.A.S.
 Tel: +33 3 87 97 98 97
 Fax: +33 3 87 97 96 86

LEACH INTERNATIONAL ASIA PACIFIC
 Tel: +852 2 191 3830
 Fax: +852 2 389 5803

The technical information provided by Leach International Europe is to be used as a guide only, and is not meant for publication or as documentation for altering any existing specification. Dimensions are in millimeters unless otherwise specified. Rev. 02/2025